
15006 HEN SPRINGER RIDER



TECHNICAL DATA:

Device dimensions:	0,81m x 0,46m
Device height:	~1,00m
Minimum space:	3,81m x 3,46m
Critical fall height:	0,60m
Falling area:	11,24m²
Depth of foundations:	-0,60m

Top view with falling area

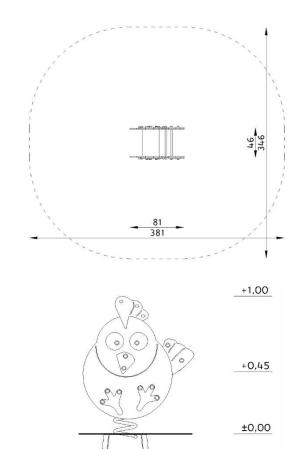

The device according to EN 1176-1:2012 Playground equipment and surfacing – Part 1: General safety requirements and test methods.

Safety surfaces:

- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

MATERIALS:

Decorative elements:	HDPE sheet
Handles, leg supports:	stainless steel pipes
Steel elements:	galvanized steel, powder coated
Spring:	spring steel, galvanized and powder coated in red
Caps:	plastic
Foundation base:	steel structure
Foundations:	concrete class min. C12/15



Certificate beholder: Producer: Distributor:

 SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
 GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.