



TECHNICAL DATA:



Not easy accessible device,  
according to standard EN 1176-1:2017

Device dimensions:	4,14 x 5,88m
Device height:	3,20m
Minimum space:	7,14 x 9,37m
Falling area:	54,57m <sup>2</sup>
Critical fall height:	1,70m
Foundations depth:	-0,60m

The device according to EN 1176-1:2012  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods.

Safety surfaces:  
sand, gravel, bark, synthetic surface  
- minimal thickness for loose particulate materials 200+100mm  
- synthetic surface according to critical fall height

Top view with falling area

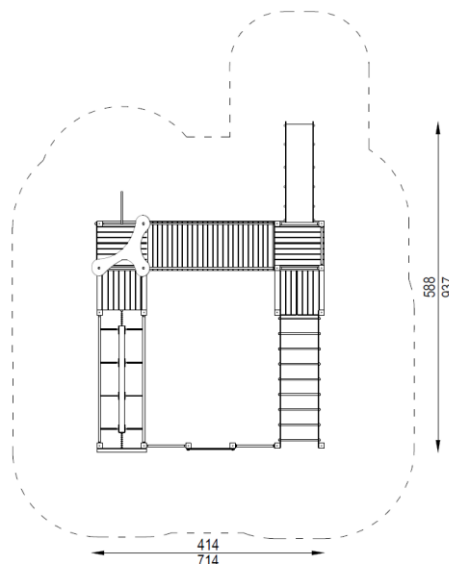

## COMPONENTS:

Tower without roof, platform 0,60m		2 pcs.
Tower without roof, platform 0,90m	1 pc.	
Tower with roof, platform 0,90m	1 pc.	
Vertical ladder	1 pc.	
Slide 0,90m	1 pc.	
Fireman's pole 0,90m	1 pc.	
Horizontal ladder	1 pc.	
Arch bridge	1 pc.	
Movable bridge	1 pc.	
Flip tube	1 pc.	

## MATERIALS:

Construction poles:	glued laminated pine timber, with a cross-section of 90x90mm, rounded at the edges, painted in brown
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets, 15mm thick
Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface, 35mm thick
Steel elements:	galvanized steel, powder coated
Chains:	galvanized steel
Surface of slope slide:	stainless steel, 1,5 mm thick
Horizontal ladder:	sides made of HDPE board 15mm, rungs: stainless steel Ø25mm
Caps:	Plastic
Foundations:	concrete min. C12/15 standard 5



SATERNUS DISTRIBUTION Sp. z o.o.  
sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificateholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.