

**TECHNICAL DATA:**



Easy accessible device,  
according to standard EN 1176-1:2017

Device dimensions:	4,15 x 4,65m
Device height:	3,20m
Minimum space:	7,04 x 7,69m
Falling area:	49,10m <sup>2</sup>
Critical fall height:	1,70m
Foundations depth:	-0,60m

The device according to EN 1176-1:2012  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods.

Safety surfaces:  
sand, gravel, bark, synthetic surface  
- minimal thickness for loose particulate materials 200+100mm  
- synthetic surface according to critical fall height

**Top view with falling area**

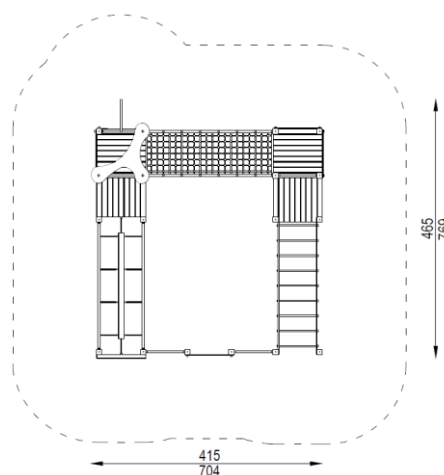

## COMPONENTS:

Tower without roof, platform 0,30m	2 pcs.
Tower without roof, platform 0,90m	2 pcs.
Tower with roof, platform 0,90m	1 pc.
Vertical ladder	2 pcs.
Fireman's pole 0,90m	1 pc.
Horizontal ladder	1 pc.
Rope bridge	1 pc.
Movable bridge	1 pc.
Flip tube	1 pc.

## MATERIALS:

Construction poles:	steel square profiles with a cross-section of 80x80mm, galvanized, powder coated in gray
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets, 15mm thick
Platforms, gangways:	waterproof formwork plywood, with non-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Chains:	galvanized steel
Ropes:	polypropylene steel braided, connected to each other by plastic connectors
Horizontal ladder:	sides made of HDPE board 15mm, rungs: stainless steel Ø25mm
Caps:	Plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o.  
sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificateholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.