




**TECHNICAL DATA:**

Easily accessible device,  
according to standard EN 1176-1:2017


Device dimensions:	5,04 x 3,82m
Device height:	3,25m
Minimum space:	7,94 x 7,18m
Falling area:	40,36m <sup>2</sup>
Critical fall height:	1,20m
Foundations depth:	-0,60m

**Top view with falling area**

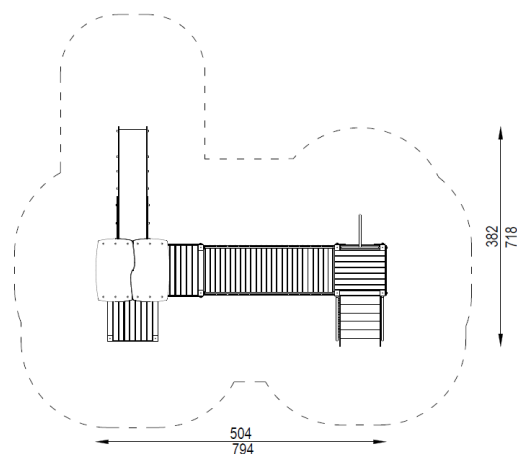

The device according to EN 1176-1:2017  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods

- Safety surfaces:
- turf/topsoil, sand, gravel, bark, synthetic surface
  - minimal thickness for loose particulate materials 200+100mm
  - synthetic surface according to critical fall height

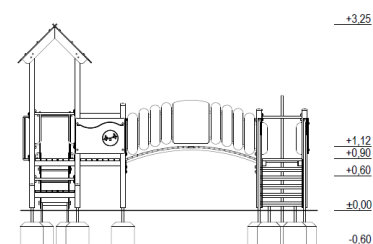

## COMPONENTS:

Tower without roof, platform 0,35m  
Tower without roof, platform 0,90m  
Tower with roof, platform 0,90m  
Entry stairs 0,90m  
Vertical ladder  
Slide 0,90m  
Fireman's pole 0,90m  
Arched bridge  
Balcony

1 pc  
2 pcs  
1 pc  
1 pc  
1 pc  
1 pc  
1 pc  
1 pc  
1 pc

## MATERIALS:

Construction poles: glued laminated pine timber, varnish painted dark brown  
Anchors: galvanized steel  
Flat decorative elements: HDPE sheets  
Platforms, gangway: impregnated pinewood boards, with machined anti-skid surface  
Steel elements: galvanized steel, powder coated  
Surface of the slide: stainless steel  
Caps: plastic  
Foundations: concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.