




TECHNICAL DATA:

Not easy accessible device,  
according to standard EN 1176-1:2017


Device dimensions:	8,29 x 7,12m
Device height:	3,86m
Minimum space:	11,63 x 11,06m
Falling area:	79,84m <sup>2</sup>
Critical fall height:	2,20m
Foundations depth:	-0,60m

Top view with falling area

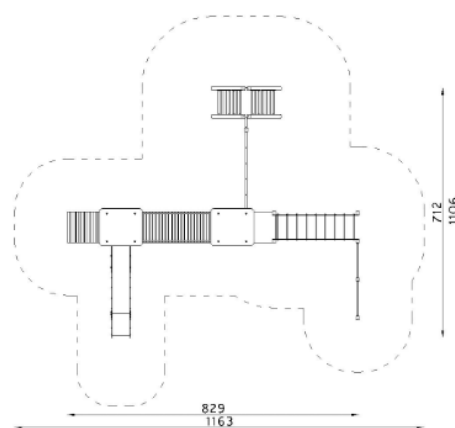

The device according to EN 1176-1:2017  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods

- Safety surfaces:
- sand, gravel, bark, synthetic surface
  - minimal thickness for loose particulate materials 300+100mm
  - synthetic surface according to critical fall height

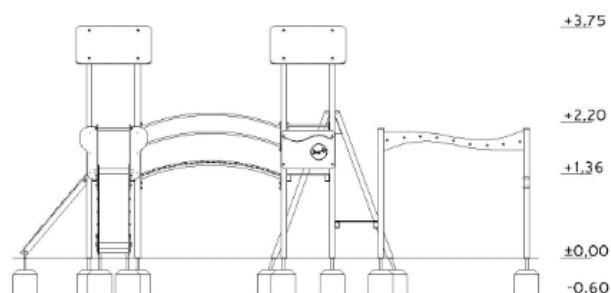

## COMPONENTS:

Tower without roof, platform 0,60m	1 pc
Tower with roof, platform 1,36m:	2 pcs
Slope gangway 1,36m:	1 pc
Vertical ladder:	1 pc
Slide 1,36m:	1 pc
Slope ladder:	1 pc
Horizontal ladder:	1 pc
Arched bridge:	1 pc
Vertical rope net:	1 pc
Flip tube :	1 pc

## MATERIALS:

Construction poles:	galvanized steel profiles, powder coated in gray,
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets,
Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface,
Steel elements:	galvanized steel, powder coated
Chains:	galvanized steel
Surface of slope slide:	stainless steel,
Horizontal ladder:	sides made of HDPE rungs: stainless steel
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.