



TECHNICAL DATA:



Not easy accessible device,
according to standard EN 1176-1:2017

Device dimensions:	9,91 x 7,80m
Device height:	3,70m
Minimum space:	13,70 x 11,07m
Falling area:	92,20m ²
Critical fall height:	2,20m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces:
- sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 300+100mm
- synthetic surface according to critical fall height

Top view with falling area

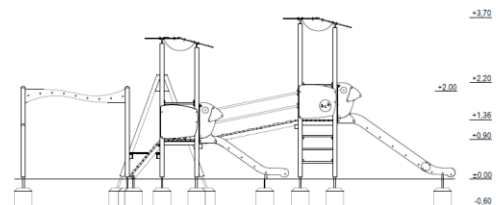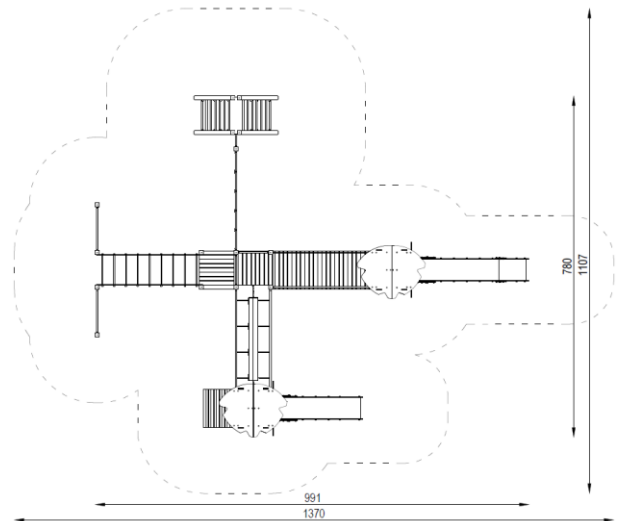

COMPONENTS:

Tower without roof, platform 0,60m:	1 pc
Tower without roof, platform 0,90m:	1 pc
Tower with roof, platform 0,90m:	1 pc
Tower with roof, platform 1,36m:	1 pc
Slope gangway 0,90m:	1 pc
Vertical ladder:	1 pc
Slide 0,90m:	1 pc
Slide 1,36m:	1 pc
Slope bridge:	1 pc
Movable bridge:	1 pc
Horizontal ladder:	1 pc
Slope ladder:	1 pc
Vertical rope net:	1 pc
Flip tube:	1 pc

MATERIALS:

Construction poles:	glued laminated pine timber, rounded at the edges, varnish painted dark brown
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets,
Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface,
Steel elements:	galvanized steel, powder coated
Chains:	galvanized steel
Surface of slope slide:	stainless steel,
Horizontal ladder:	sides made of HDPE rungs: stainless steel
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.