





TECHNICAL DATA:

Device dimensions: 0,43m x 3,00m

Device height: ~0,95m


Minimum space: 2,50 x 5,00m

Falling area: 11,64 m²

Critical fall height: 0,91

Depth of foundations: -0,60m

Top view with falling area

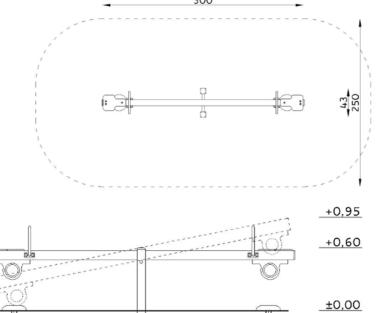

-0,60

500

The device according to EN 1176-1:2017

Playground equipment and surfacing - Part 1: General safety requirements and test methods.

Safety surfaces:

- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

MATERIALS:

Construction poles: steel square profiles, galvanized

Beam of swing: pine wood glued rounded at the edges, coated with acrylic gaze

Steel elements: galvanized steel, powder coated

HDPE sheet **Seats:**

made of rubber granulate **Bumper:**

Covers: plastic

Foundations: concrete class min. C12/15



Certificate beholder: Producer: Distributor:

SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, 41500 Chorzów, Poland item 83), and in particular Art. 78 and 79 of this Law.