



**TECHNICAL DATA:**


Not easily accessible device,  
according to standard EN 1176-1:2017

- Device dimensions: 4,15 x 6,80m
- Device height: 3,40m
- Minimum space: 7,04 x 10,30m
- Falling area: 47,40m<sup>2</sup>
- Critical fall height: 0,90m
- Foundations depth: -0,60m

The device according to EN 1176-1:2017  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods

- Safety surfaces:
- turf/topsoil, sand, gravel, bark, synthetic surface
  - minimal thickness for loose particulate materials 200+100mm
  - synthetic surface according to critical fall height

**Top view with falling area**

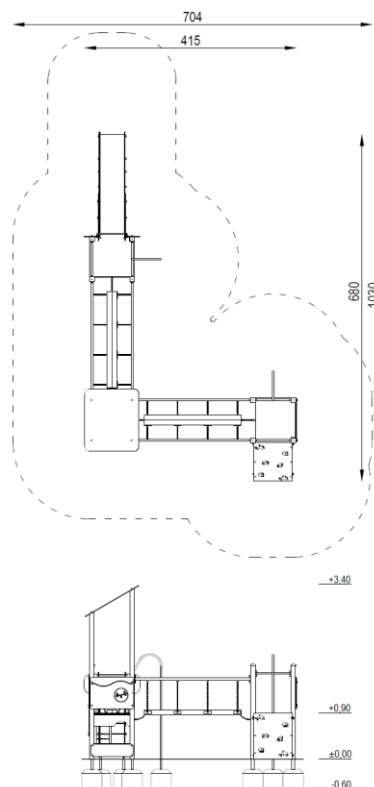

## COMPONENTS:

Tower with roof, platform 90cm:	1 pc
Tower without roof, platform 90cm:	2 pcs
Climbing wall 90cm:	1 pc
Slide 90cm:	1 pc
Fireman's pole 90cm:	2 pcs
Mobile bridge:	2 pcs
Small toyshop:	1 pc
Drawing board:	1 pc

## MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Flat decorative elements:	HDPE sheets
Platforms:	waterproof plywood, with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Surface of slide:	stainless steel
Climbing walls:	waterproof plywood, climbing grips based on resins
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.