



TECHNICAL DATA:



Easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	4,26 x 4,65m
Device height:	2,95m
Minimum space:	7,04 x 7,69m
Falling area:	49,10m ²
Critical fall height:	1,70m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces:
- paved, turf / topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Top view with falling area

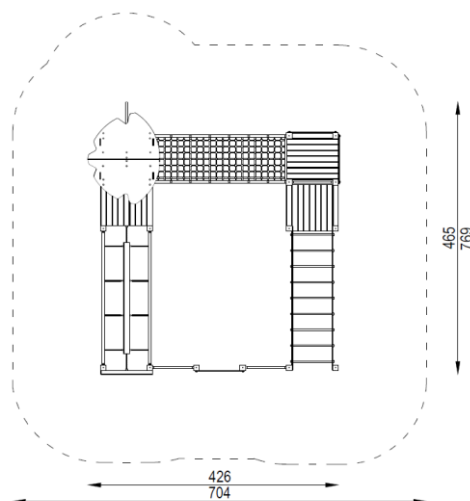

COMPONENTS:

Tower without roof, platform 0,30m	2 pcs
Tower without roof, platform 0,90m	1 pcs
Tower with roof, platform 0,90m	1 pc
Fireman's pole 0,90m	1 pc
Vertical ladder	2 pcs
Horizontal ladder	1 pc
Rope bridge	1 pc
Movable bridge	1 pc
Flip tube	1 pc

MATERIALS:

Construction poles:	glued laminated pine timber, varnish painted dark brown
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets
Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface
Steel elements:	galvanized steel, powder coated
Horizontal ladder:	sides made of HDPE rungs: stainless steel
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.