

TECHNICAL DATA:


Not easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	28,87 x 4,25m
Device height:	4,13m
Minimum space:	29,00 x 4,45m
Falling area:	129,05m ²
Critical fall height:	1,58m
Foundations depth:	-1,00m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces:
- sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials
200+100mm
- synthetic surface according to critical fall height

Top view with impact area

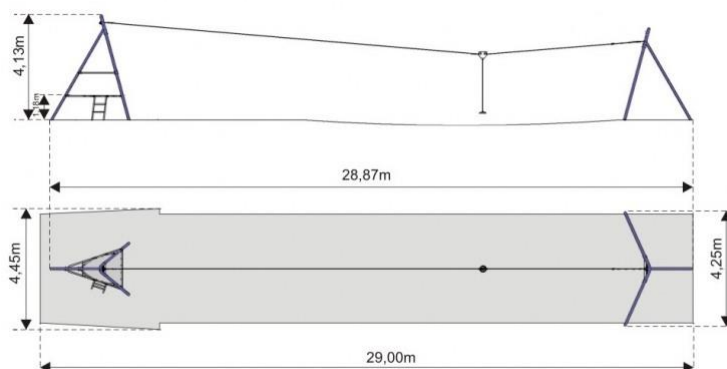

MATERIALS:

Construction: steel pipes, galvanized and powder coated
Rope: steel Ø10 mm
Punch: stainless steel
Platform: galvanized steel, powder coated, chequer plate filling
Seat: EPDM with aluminum insert, galvanized chain with rubber cover
Trolley: stainless steel
Foundations: concrete min. C16/20 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate holder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.