

### TECHNICAL DATA:



Not easily accessible device,  
according to standard EN 1176-1:2017

Device dimensions:	3,38 x 6,54m
Device height:	2,36m
Minimum space:	7,22 x 10,03m
Falling area:	72,41m <sup>2</sup>
Critical fall height:	2,20m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods

Safety surfaces:  
- sand, gravel, bark, synthetic surface  
- minimal thickness for loose particulate materials 300+100mm  
- synthetic surface according to critical fall height

### Top view with falling area

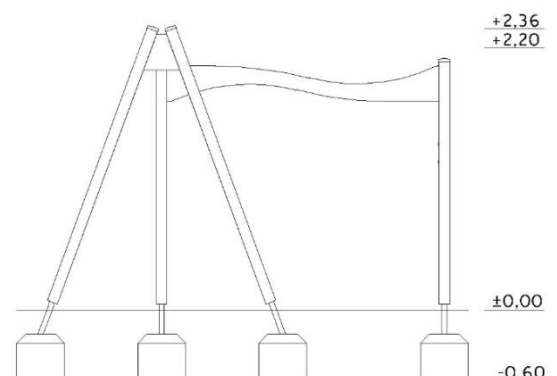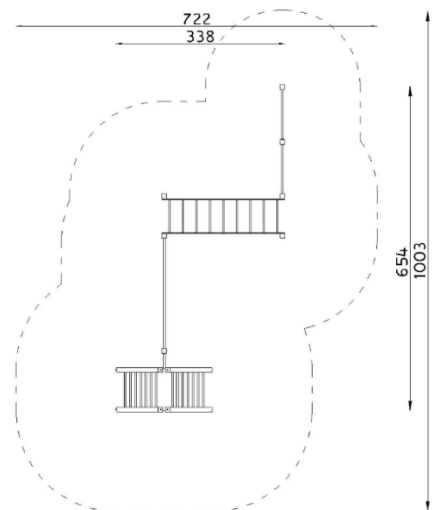

## COMPONENTS:

Horizontal ladder:	1 pc
Diagonal ladder:	1 pc
Horizontal ropes net:	1 pc
Coups set:	1 pc

## MATERIALS:

Construction poles:	glued pine wood, rounded at the edges, coated with acrylic glaze
Anchors:	galvanized steel,
Decorative elements:	HDPE sheets,
Steel elements:	galvanized steel, powder coated
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.